

Fermi surface spectroscopy: a magnetic resonance approach

J.M. Schrama^a, S.O. Hill^b, J. Singleton^{a,*}, A. Ardavan^a, E. Rzepniewski^a,
R. Edwards^a

^aDepartment of Physics, University of Oxford, The Clarendon Laboratory, Parks Road, Oxford OX1 3PU, UK

^bDepartment of Physics, Montana State University, Bozeman MT 59717, USA

Abstract

We describe recently-developed GHz magneto-optical techniques which measure the Fermi-surface topologies and superconducting order parameter symmetry in organic molecular metals. © 2000 Elsevier Science B.V. All rights reserved.

Keywords: Fermiology; Magneto-optics; Organic molecular metals

Quasi-two-dimensional (Q2D) organic molecular metals have attracted enormous attention in recent years, as they exhibit a wide range of low-temperature ground states and yet possess Q2D Fermi surfaces (FSs) which may be accurately represented using tractable analytical models [1]. Here we review recently derived methods for establishing the FS topology of these systems which involve GHz magneto-optical techniques.

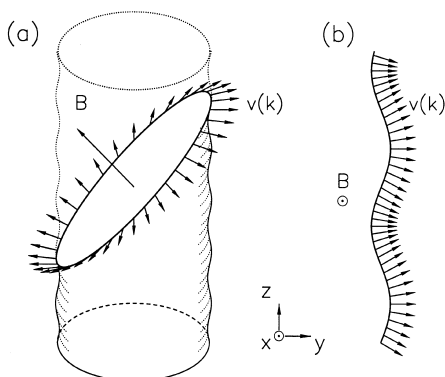


Fig. 1. Schematic view of two types of orbit on the Fermi surfaces (FSs) of organic metals in a magnetic field \mathbf{B} . (a) closed orbit around warped Q2D FS section. (b) open orbit along Q1D FS section. The arrows indicate the quasiparticle velocities.

The path of a quasiparticle of energy $E(\mathbf{k})$ and velocity \mathbf{v} in a magnetic field \mathbf{B} is determined by the equations $\hbar\mathbf{v} = \nabla_{\mathbf{k}}E(\mathbf{k})$ and $\hbar\partial\mathbf{k}/\partial t = -e\mathbf{v} \times \mathbf{B}$, where $\nabla_{\mathbf{k}}$ is the gradient operator in k -space. Quasiparticles at the FS

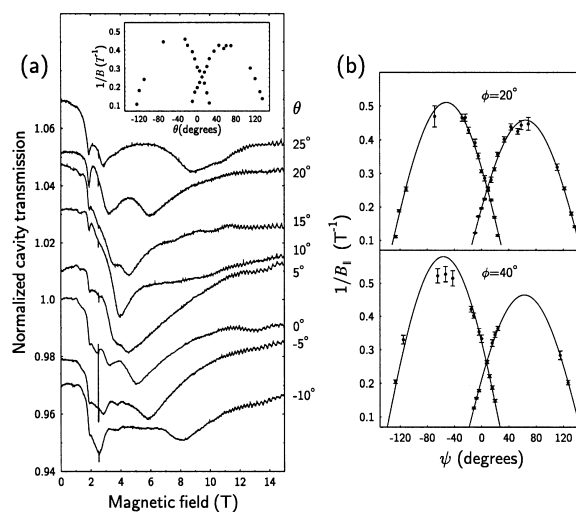


Fig. 2. (a) FTRs in α -(ET)₂KHg(SCN)₄ at $T = 1.4$ K and 70 GHz using a rectangular cavity tilted to angles θ in the field. FTR fields are plotted versus θ (inset) and ψ (b), where ψ is the angle between \mathbf{B} and the warping direction of the Q1D FS. Data are shown in (b) for two orientations of the sample within the cavity. The ψ dependence in (b) unambiguously identifies FTRs [4].

* Corresponding author.

E-mail address: j.singleton1@physics.ox.ac.uk (J. Singleton)

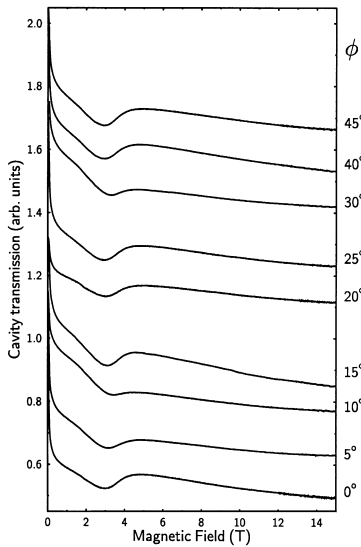


Fig. 3. Transmission of a cavity containing a κ -(ET) $_2$ Cu(NCS) $_2$ crystal (70 GHz, 1.4 K); the Q2D planes are parallel to \vec{H} and normal to \vec{B} , but \vec{H} is rotated in the Q2D plane by angles ϕ ; the induced in-plane current thus varies in direction. The dip at ~ 3 T marks the change in dissipation at H_{c2} ; its size varies with ϕ , reflecting the angular variation of the order parameter [5].

will move on orbits of constant energy in the plane perpendicular to \vec{B} . Fig. 1 shows two classes of orbit important in organic molecular metals; (a) is a closed orbit about a Q2D FS section and (b) is an open orbit along a quasi-one-dimensional (Q1D) FS sheet. Note that the velocities of the quasiparticles (indicated by arrows in Fig. 1) oscillate up and down (a) or from side to side (b); the Boltzmann transport equation has been used to show that these oscillations contribute resonantly to the bulk ac conductivity [2,3]. As the corrugations of real FSs will not in general be sinusoidal, the conductivity will also contain a series of harmonics of the fundamental frequency which in effect represent a “Fourier analysis” of the shape of the Fermi-surface section [2,3]. Resonances from Q2D sections of FS are termed “periodic orbit resonances” (PORs) [2]; those from the Q1D FS sections are called Fermi-surface traversal resonances (FTRs) [4]. The high-frequency bulk conductivity is mea-

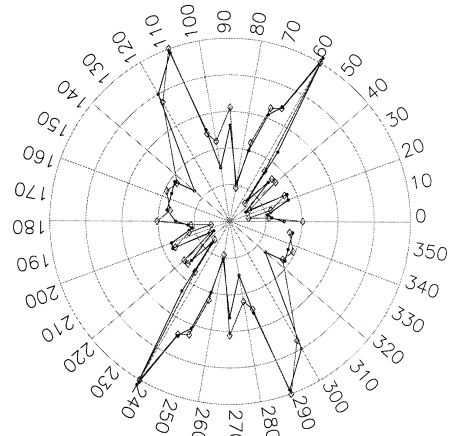


Fig. 4. The normalised amplitude of the dip in Fig. 3 versus ϕ ; The underlying d-like symmetry of the order parameter can clearly be seen [1,5].

sured using the transmission of a rectangular [4] or cylindrical [2] resonant cavity loaded with a sample. The oscillating H -field \vec{H} in the cavity is parallel to the sample’s highly conducting Q2D planes; induced currents flow in the low-conductivity interplane direction, so that the skin-depth \gg the sample size [4]. FTRs have a characteristic dependence on the direction of \vec{B} ; hence, experiments are done using rectangular cavities which tilt in the static field [4]. FTRs observed in the organic metal α -(ET) $_2$ KHg(SCN) $_4$ are seen in Fig. 2 as broad absorptions above ~ 4 T [4].

The bulk GHz conductivity is also affected by the presence of superconductivity. GHz conductivity measurements have been used to identify the presence of an anisotropic (d-wave-like) order parameter in the organic superconductor κ -(ET) $_2$ Cu(NCS) $_2$ (see Figs. 3 and 4) [5].

References

- [1] Jörg Schmalian, Phys. Rev. Lett. 81 (1998) 4232.
- [2] S. Hill et al., Physica B 246–247 (1998) 110.
- [3] S.J. Blundell et al., Phys. Rev. B 55 (1997) R6129.
- [4] A. Ardavan et al., Phys. Rev. Lett. 81 (1998) 713.
- [5] J.M. Schrama et al., Phys. Rev. Lett. 83 (1999) 3041.